



# Novec™

Brand

## 3M™ Novec™ 5110 Insulating Gas

### Introduction

3M™ Novec™ 5110 Insulating Gas is a sustainable alternative to sulfur hexafluoride (SF<sub>6</sub>). This is an advanced insulation medium combining excellent electrical insulation performance with desirable environmental properties. Novec 5110 gas in pure form has a relative dielectric strength 1.4 times greater than SF<sub>6</sub> at a given pressure.

With a GWP of less than 1 and strong dielectric properties, Novec 5110 gas is a sustainable SF<sub>6</sub> alternative for arc quenching and insulation applications leading to dramatic environmental impact reductions in gas insulated equipment a reality. Novec 5110 gas is non-flammable and has a wide safety margin for workers when used as designed for intended applications.

### Product Description

Not for specification purposes. All values @ 77°F unless otherwise specified.

#### Composition of 3M™ Novec™ 5110 Insulating Gas

Chemical Formula	CF <sub>3</sub> C(O)CF(CF <sub>3</sub> ) <sub>2</sub>
1,1,1,3,4,4,4-heptafluoro-3-(trifluoromethyl)- 2-butanone	99.5 mole %, minimum

### Typical Physical Properties

Not for specification purposes. All values @ 77°F unless otherwise specified.

#### 3M™ Novec™ 5110 Insulating Gas


Molecular Weight (g/mol)	266
Flash Point (°F)	Non-flammable
Boiling Point (°F)	80.4
Freezing Point (°F)	-166
Critical Temperature (°F)	295
Critical Pressure (psia)	311
Gas Density at 14.5 psia (lb/ft <sup>3</sup> )	0.67
Vapor Pressure (psia)	13.6
Dielectric Strength at 14.5 psia, disk electrodes, 0.1 in gap (kV)	18.4 at saturation

## Key Features and Benefits

- Excellent dielectric properties for medium and high voltage applications
- Global warming potential (GWP) of less than 1
- When used in a gas mixture, the greenhouse gas (GHG) impact can be reduced by up to 99.99% compared with SF<sub>6</sub>
- Non-flammable
- Non-ozone depleting
- Wide safety margin for workers when used as designed for intended applications
- Compatible with a wide range of equipment components


### Vapor Pressure of Novec 5110 Insulating Gas compared to SF<sub>6</sub>

Not for specification purposes. All values @ 77°F unless otherwise specified

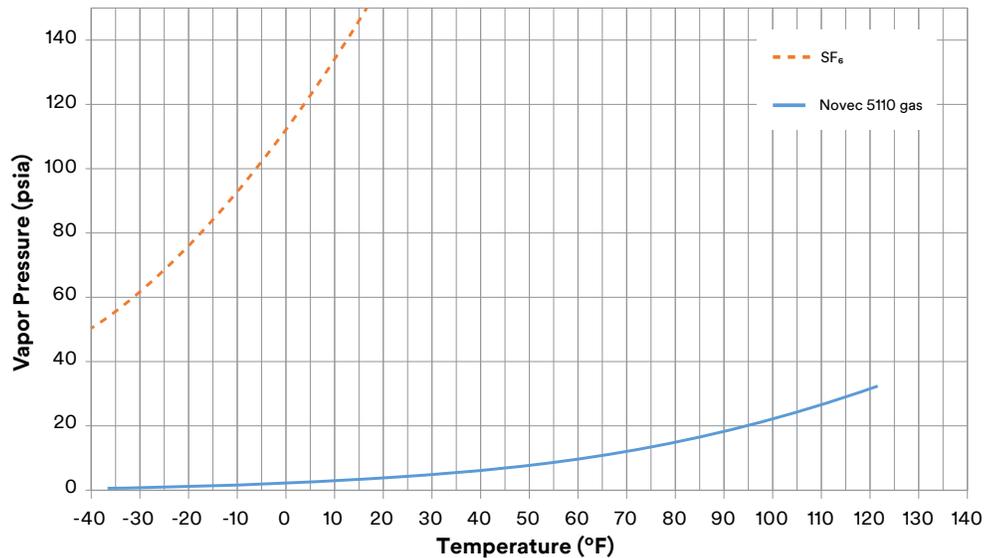

### Dielectric Breakdown Voltage: Mixtures of Novec 5110 Gas in Air (Uniform field using parallel disk electrodes with 0.1 inch gap)

Not for specification purposes. All values @ 77°F unless otherwise specified

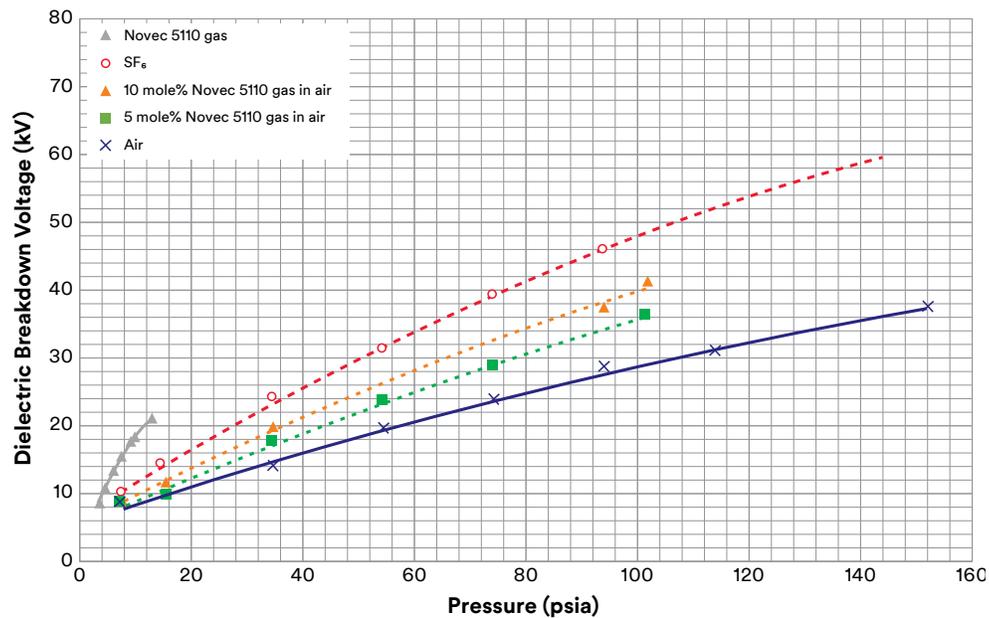

## Typical Applications


- Versatile insulating gas for medium and high voltage applications including gas insulated lines, gas insulated switchgear and circuit breakers
- Mix with inert gases for electric power industry applications
- Ideal for indoor applications

## Safety and Handling

Before using this product, please read the current Safety Data Sheet (available at [3M.com/SDS](http://3M.com/SDS) or through your 3M sales or technical service representative) and the precautionary statement on the product package and labels. Follow all applicable precautions and directions.

### Dielectric Breakdown Voltage of Novec 5110 Gas Compared to SF<sub>6</sub> (Uniform field using parallel disk electrodes with 0.1 inch gap)

Not for specification purposes. All values @ 77°F unless otherwise specified

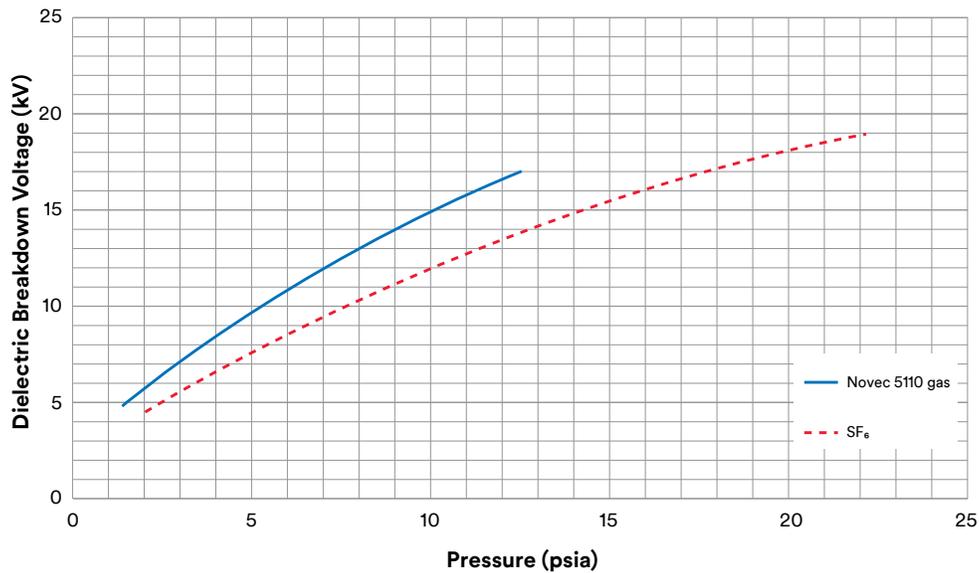

## Environmental Properties

	3M™ Novec™ 5110 Insulating Gas	SF <sub>6</sub>
Atmospheric Lifetime (years)	0.04	3,200
Global Warming Potential (100-yr ITH, IPCC 2013 method)	<1	23,500
Ozone Depletion Potential (CFC-11 = 1)	0	0

## Materials Compatibility

In practice, 3M™ Novec™ 5110 Insulating Gas differs somewhat in materials compatibility compared to SF<sub>6</sub>. While the product is compatible with most common metals, it can be affected by some of the components found in lubricating greases and the elastomers used in gaskets and o-rings.

Many materials have been found to be compatible with the product. However, material compatibility is best evaluated using the specific materials of construction being considered for contact with the Novec 5110 gas. 3M research scientists are available to assist with material compatibility evaluations. Contact your local 3M sales representative for additional information.

## Regulatory Status

Novec 5110 gas is a single constituent product and has been REACH registered (Annex VII) in Europe and TSCI registered in Taiwan. It is currently under TSCA research and development status in the United States (pre-manufacture notice (PMN) in progress). It is under low volume exemption in China and Japan. Registration and notification are in progress in other regions and countries. Contact your local 3M sales representative for additional information.

---

## The 3M™ Novec™ Brand Family

The Novec brand is the hallmark for a variety of proprietary 3M products. Although each has its own unique formula and performance properties, all Novec products are designed in common to address the need for smart, safe and sustainable solutions in industry-specific applications. These include precision and electronics cleaning, heat transfer, fire protection, protective coatings, immersion cooling, advanced insulation media replacement solutions and several specialty chemical applications.

---

3M™ Novec™ Engineered Fluids • 3M™ Novec™ Aerosol Cleaners • 3M™ Novec™ 1230 Fire Protection Fluid • 3M™ Novec™ Electronic Grade Coatings • 3M™ Novec™ Electronic Surfactants • 3M™ Novec™ Insulating Gases

---

**Safety Data Sheet:** Consult Safety Data Sheet before use.

**Regulatory:** For regulatory information about this product, contact your 3M representative.

**Technical Information:** The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

**Product Use:** Many factors beyond 3M's control and uniquely within user's control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

**Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OR TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



### Electronics Materials Solutions Division

3M Center, Building 224-3N-11  
St. Paul, MN 55144-1000 USA

Web [www.3M.com/novec](http://www.3M.com/novec)  
Phone 1-800-810-8513

Please recycle. Printed in USA.  
©3M 2017. All rights reserved.  
Issued: 5/17 12472HB  
60-5002-0727-3

3M and Novec are trademarks of 3M Company.  
Used under license by 3M subsidiaries and affiliates.